




Telefon: +49 (0) 9721 79398-0
 Telefax: +49 (0) 9721 79398-14
 E-Mail: info@labelident.de
 Internet: www.labelident.com

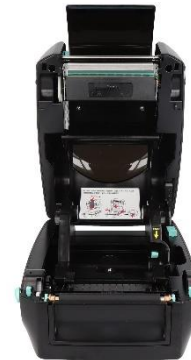

Mini-Desktop Printer	Labelident BP730	Labelident BP730i
Print Method	Thermal transfer and thermal direct printer	
Resolution	300 dpi	300 dpi
Print Width	Max. 105,7 mm	Max. 108,0 mm
Print Height	min. 4 mm, max. 762 mm	min. 3 mm, max. 1.727 mm
Print Speed	102 mm/s	127 mm/s
Electronics	8 MB Flash (4 MB for applications) 16 MB SDRAM	
Sensors	Adjustable and reflecting, movable media sensor	
Interfaces	Seriell (RS-232) (DP-9), USB 2.0, Ethernet	Seriell (RS-232 (DB-9), USB 2.0, Ethernet (10/100 Mbps printserver) USB Host
Printer Language	EZPL, EEPL, GZPL, automatic adjustment	
Dimensions, Weight	210 mm x 186 mm x 280 mm (WxHxD), 2,8 kg	210mm x 186 mm x 280 mm (WxHxD), 3 kg
Display	READY and STATUS LED, automatic calibration button FEED button	Colour TFT-LCD display with navigation button, automatic calibration button
ribbons	1" (25,4 mm) Roll core, outside winding, width: 30 - 110 mm, length: max. 300 m	
labels	Matrix free / Black Mark/ marker holes/ continuous, outside winding, Thickness:: 0,06 - 0,20 mm, Linder width: 25,4 - 118 mm, outside Ø: 1" or 1,5" roll core (25,4 or 38,1 mm) max. 127 mm	
Barcodes and image file formats	1-D, 2-D Barcodes, BMP and PCX can be saved directly. All others can be downloaded via software	
Options	USB-Device + parallel interfaces, Guillotine-Cutter, label dispenser, external roll mount für 250 mm rolls, external label rewinder	Bluetooth Modul, Cutter, label dispenser, external roll mount für 250 mm rolls, external label rewinder
Label Software (included)	GoLabel (only for EZPL)	GoLabel (only EZPL)